




MacBook Air 13" Early 2015 Logic Board Replacement

Replace the logic board in your MacBook Air 13" Early 2015.

Written By: Sam Lionheart

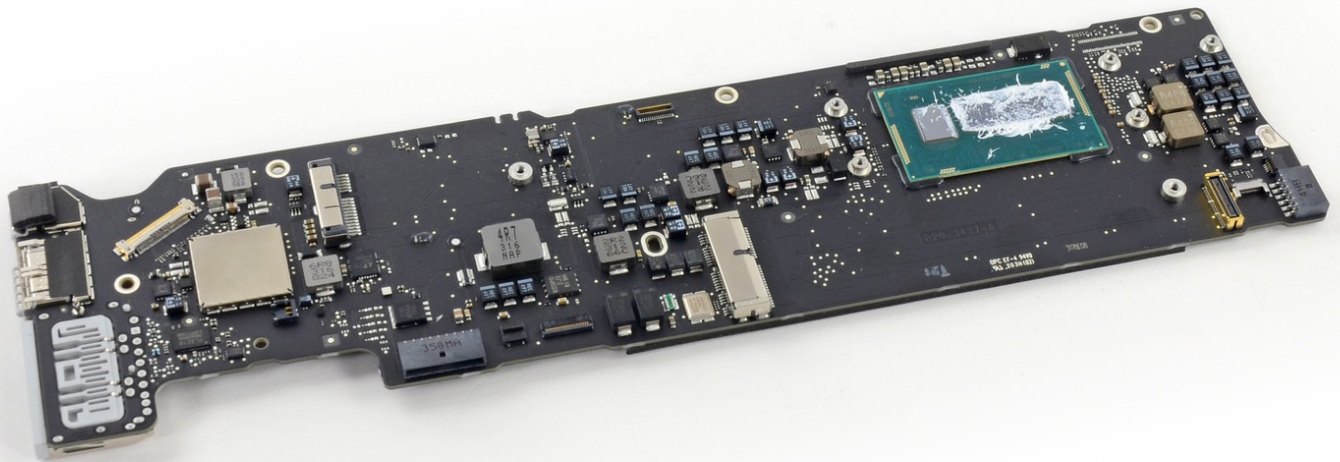

INTRODUCTION

Use this guide to replace a faulty logic board in your MacBook Air 13" Early 2015.

Be sure to [apply a new layer of thermal paste](#) before reinstalling your heat sink on your new logic board.



TOOLS:

- [Arctic Silver ArctiClean](#) (1)
- [Arctic Silver Thermal Paste](#) (1)
- [P5 Pentalobe Screwdriver Retina MacBook Pro and Air](#) (1)
- [Spudger](#) (1)
- [T5 Torx Screwdriver](#) (1)



PARTS:

- [MacBook Air 13" \(Early 2015\) 1.6 GHz Logic Board](#) (1)
- [MacBook Air 13" \(Early 2015\) 2.2 GHz Logic Board](#) (1)
- [MacBook Air 13" \(Mid 2011 to Early 2015\) Screw Set](#) (1)

Step 1 — Lower Case



i Before proceeding, power down your machine. Close the display and lay it on a soft surface top-side down.



- Remove the following ten screws:
 - Two 9 mm P5 Pentolobe screws
 - Eight 2.6 mm P5 Pentolobe screws
- The special screwdriver needed to remove the ten 5-point Pentolobe screws can be found [here](#).



Step 2




- Wedge your fingers between the display and the lower case and pull upward to pop the lower case off the Air.
- Remove the lower case and set it aside.

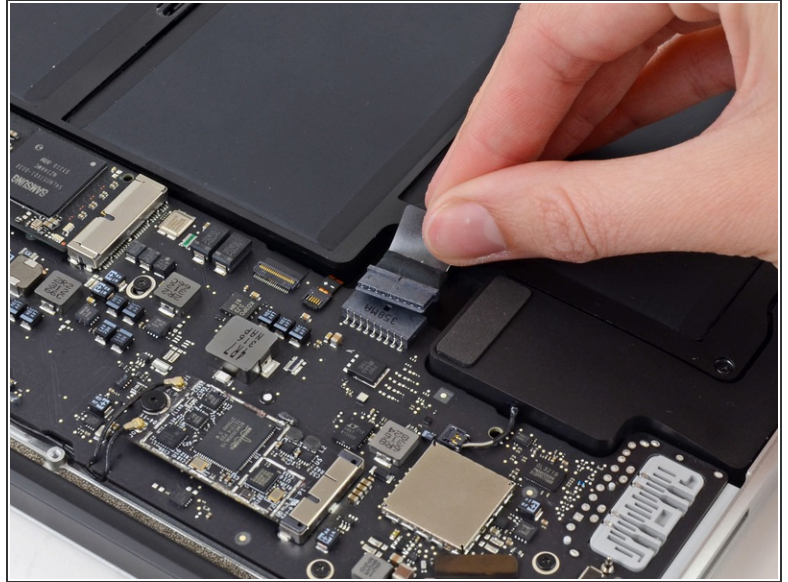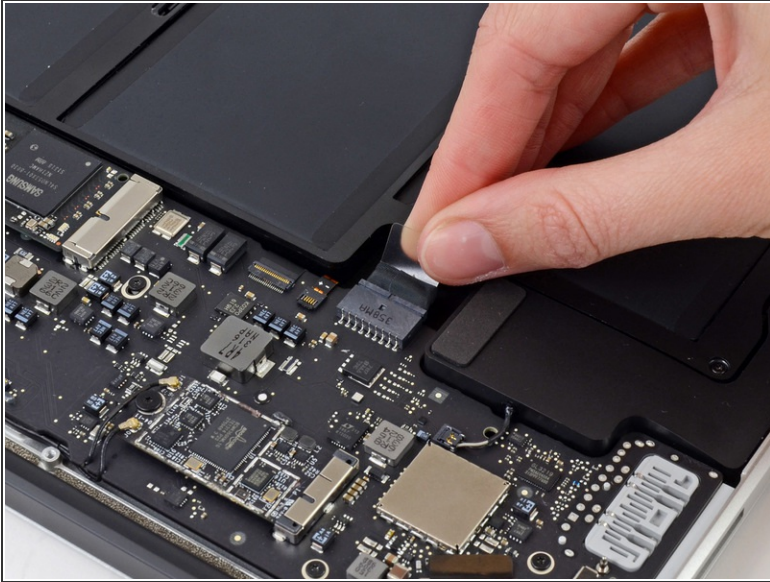Step 3 — Battery Connector



-  To ensure that everything is de-energized and won't turn on while you're working, it is recommended that you disconnect the battery.
- Grab the clear plastic pull tab attached to the battery connector and pull it toward the front edge of the Air to disconnect the battery from the logic board.
-  Do not lift upward on the connector as you disconnect it.

Step 4 — I/O Board Cable

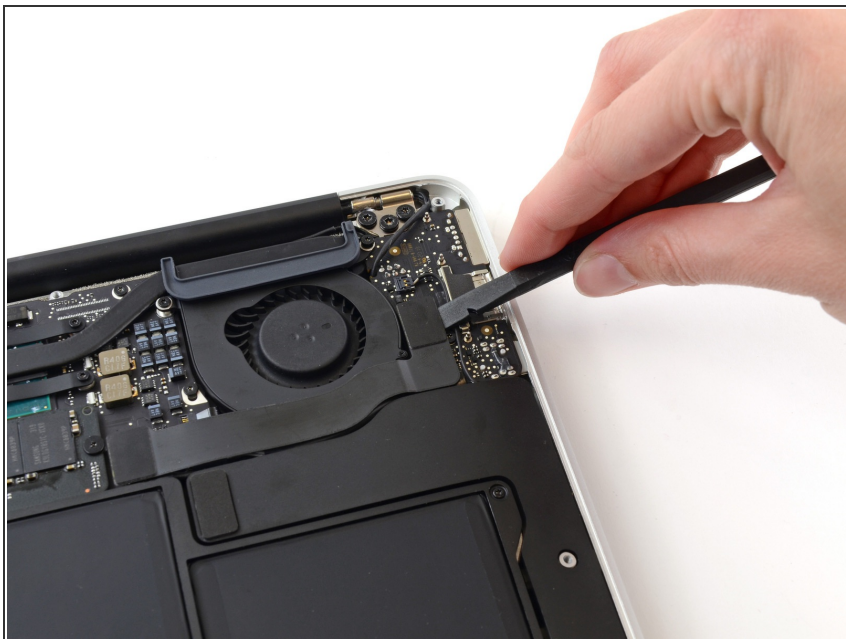

- Use the flat end of a spudger to pry the I/O board cable connector up out of its socket on the I/O board.


Step 5



- Carefully peel the I/O board cable from the adhesive securing it to the top of the fan.


Step 6




 The following connector has an especially deep socket. Use care when disconnecting it.

- While gently pulling the I/O board cable upward near its connection to the logic board, use the flat end of a spudger to pry up on alternating sides of the connector to help "walk" it out of its socket.
- Remove the I/O board cable.

Step 7 — Fan

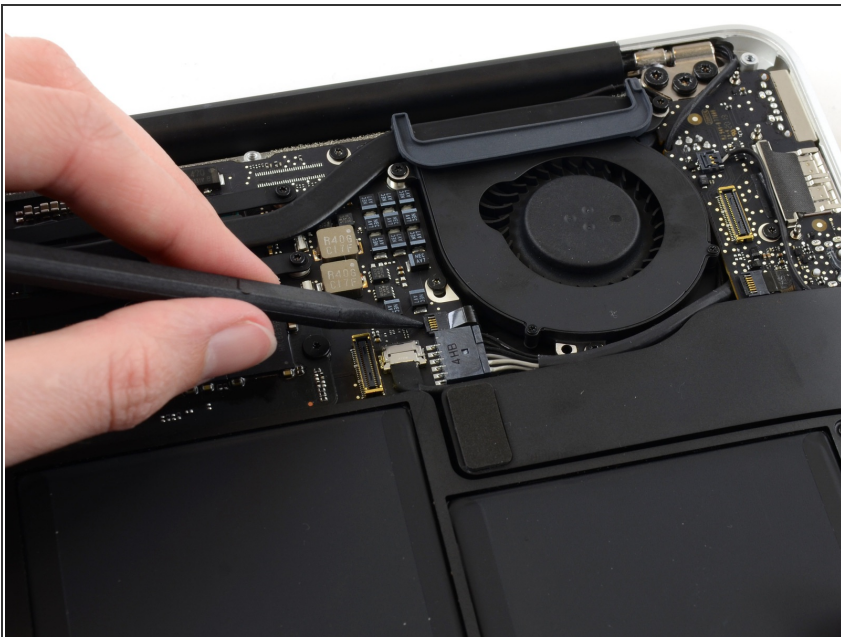

- Use the tip of a spudger to carefully flip up the retaining flap on the fan cable ZIF socket.


 Be sure you are prying up on the hinged retaining flap, **not** the socket itself.

Step 8




- Peel the rubber gasket off the adhesive on the top of the fan.

Step 9

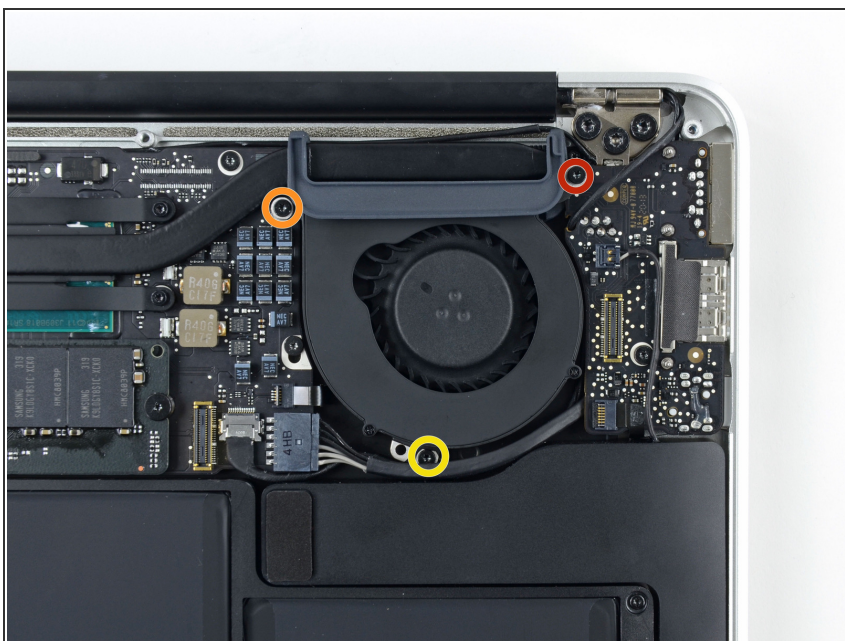

- Remove the following three screws securing the fan to the upper case:
 - One 5.2 mm T5 Torx screw
 - One 3.3 mm T5 Torx screw
 - One 4.4 mm T5 Torx screw with a short head

Step 10

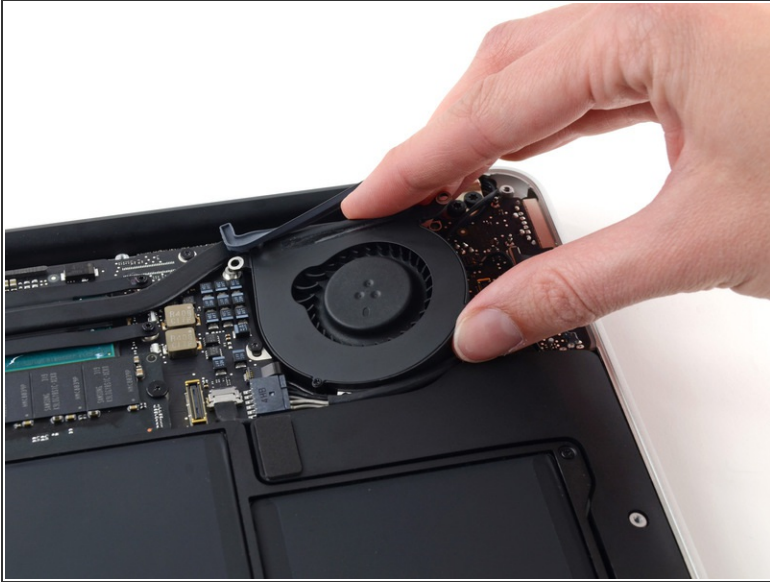



- Lift the fan from the I/O board side and pull it free from the upper case.
- Removing the fan will also disconnect the fan ribbon cable. Be careful not to snag it.

Step 11 — I/O Board



- Disconnect the I/O board by pulling its power cable away from its socket on the logic board.
- ⓘ Pull the cable parallel to the face of the logic board toward the right edge of the Air.

Step 12

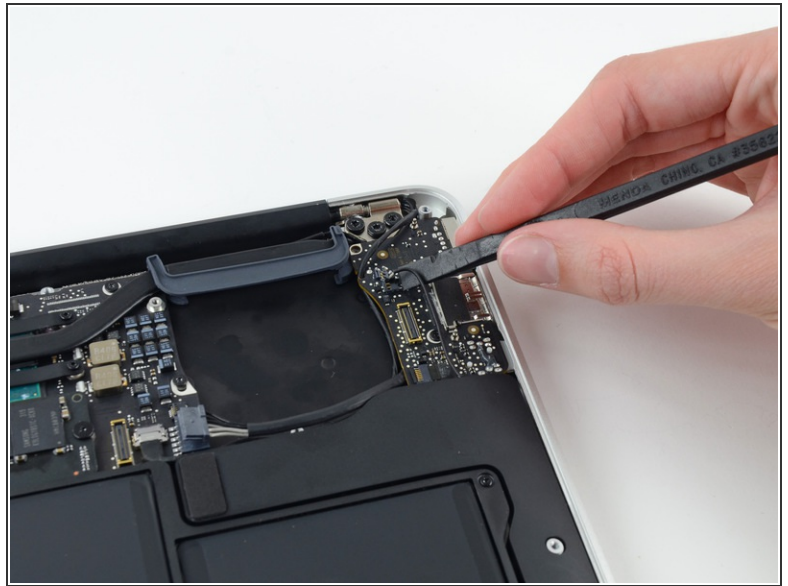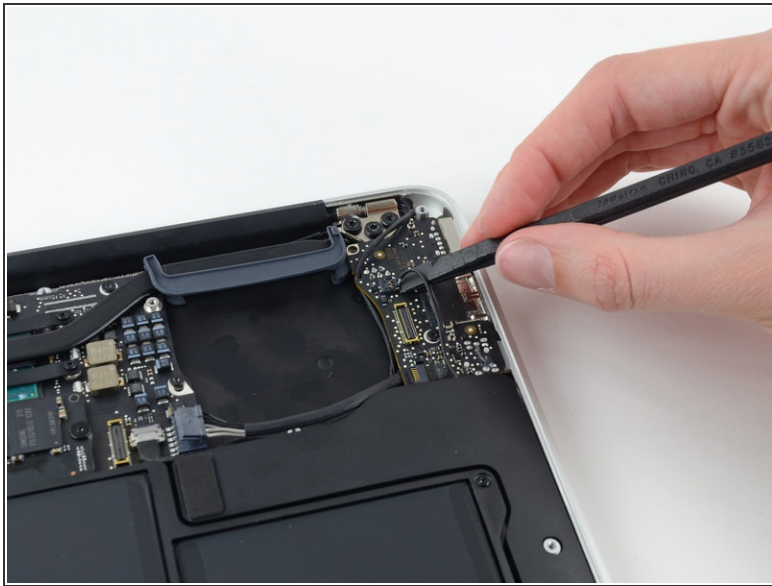

- Use the flat end of a spudger to pry the left speaker cable connector up and out of its socket on the I/O board.

ⓘ Pry up from beneath the wires.


Step 13



- Use the tip of a spudger to carefully flip up the retaining flap on the microphone ribbon cable ZIF socket.

⚠ Make sure you are flipping up the retaining flap, **not** the socket itself.

Step 14

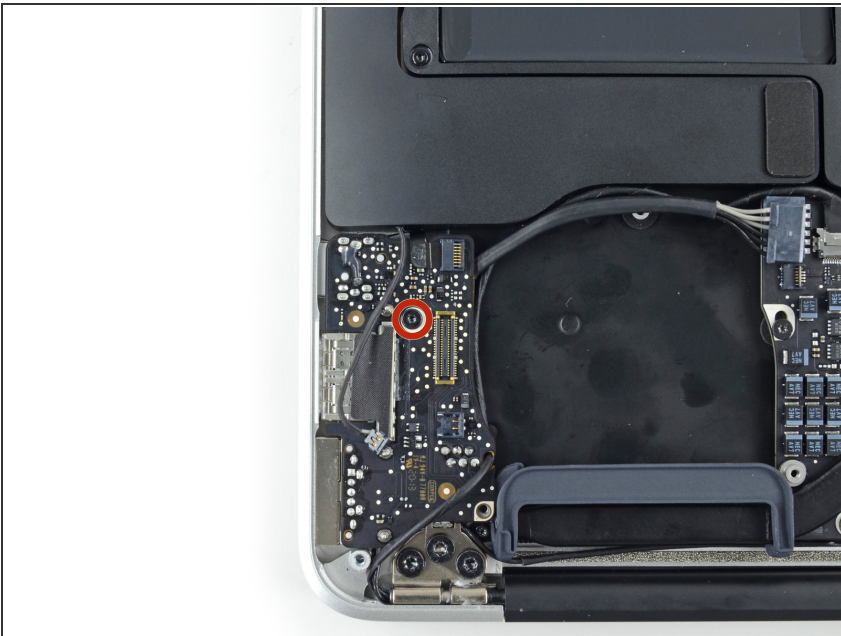


- Remove the single 4.1 mm T5 Torx screw securing the I/O board to the upper case.

Step 15




- Gently de-route the camera cable from its notch on the I/O board and push it out of the way with the tip of a spudger.

Step 16

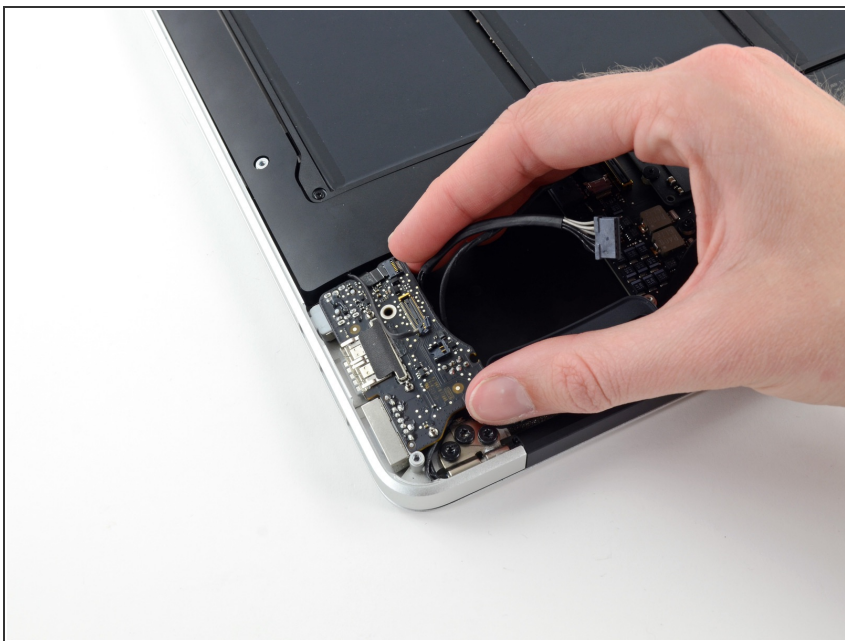


- Lift the I/O board from the logic board side and pull it free from the upper case.
- Removing the I/O board will also disconnect the microphone ribbon cable. Be careful not to snag it.


Step 17 — Battery

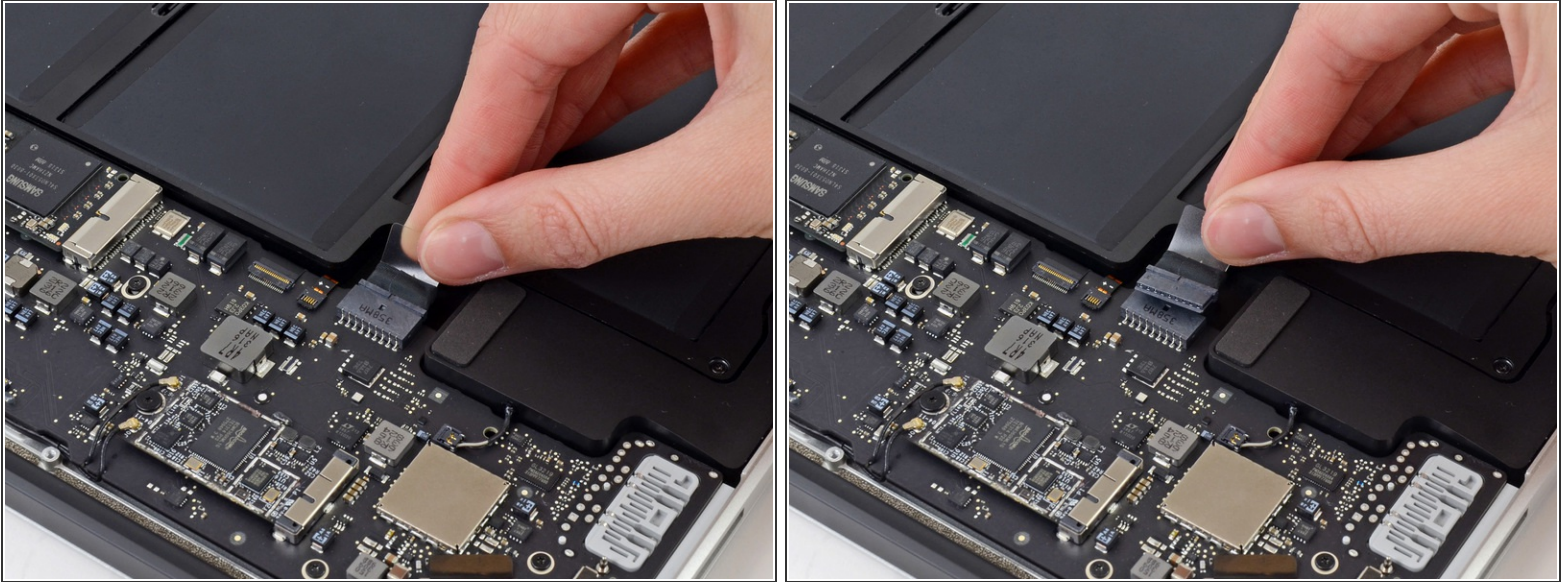

- Grab the clear plastic pull tab attached to the battery connector and pull it toward the front edge of the Air to disconnect the battery from the logic board.


 **Do not lift upward** on the connector as you disconnect it. Pull the connector away from the socket.

Step 18

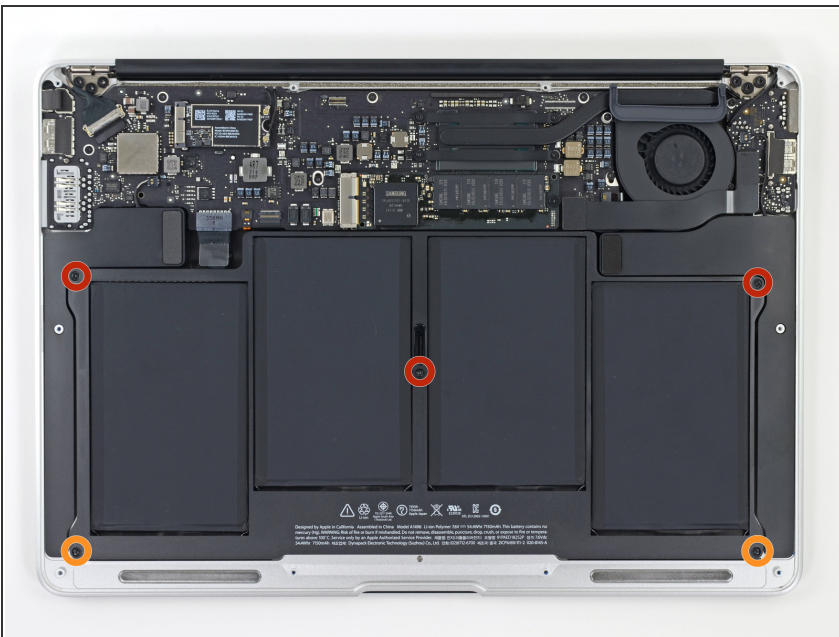

- Remove the following five screws securing the battery to the upper case:
 - Three 6.9 mm T5 Torx screws
 - Two 3.0 mm T5 Torx screws



Step 19

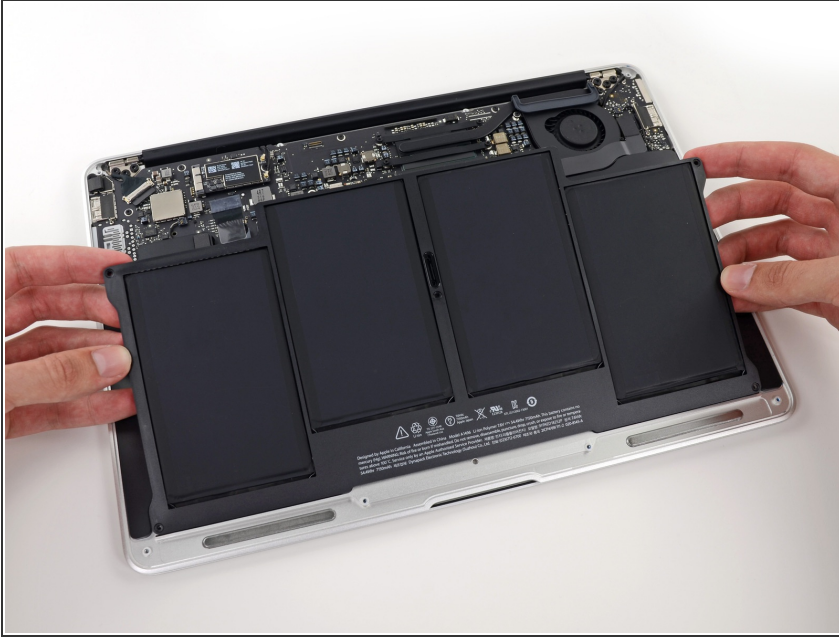

⚠ When handling the battery, avoid squeezing or touching the four exposed lithium polymer cells.



- Lift the battery from its edge nearest the logic board and remove it from the upper case.
- ☑ If you're installing a new battery, you should calibrate it before using it: allow it to drain overnight, then charge it to 100%. Let it continue charging for two more hours, then drain it again until your MacBook Air shuts down automatically. Charge it again and use it normally.

Step 20 — Logic Board Assembly

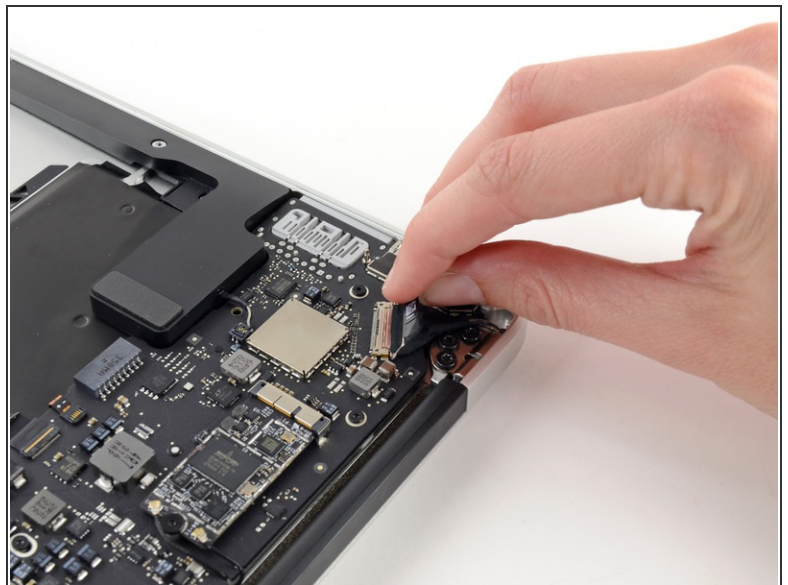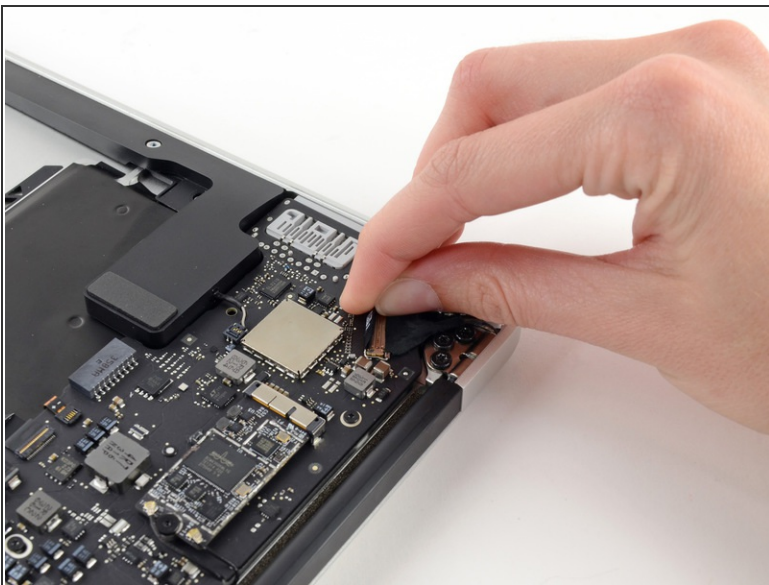

- Grab the plastic pull tab secured to the display data cable lock and rotate it towards the top side of the computer.


Step 21

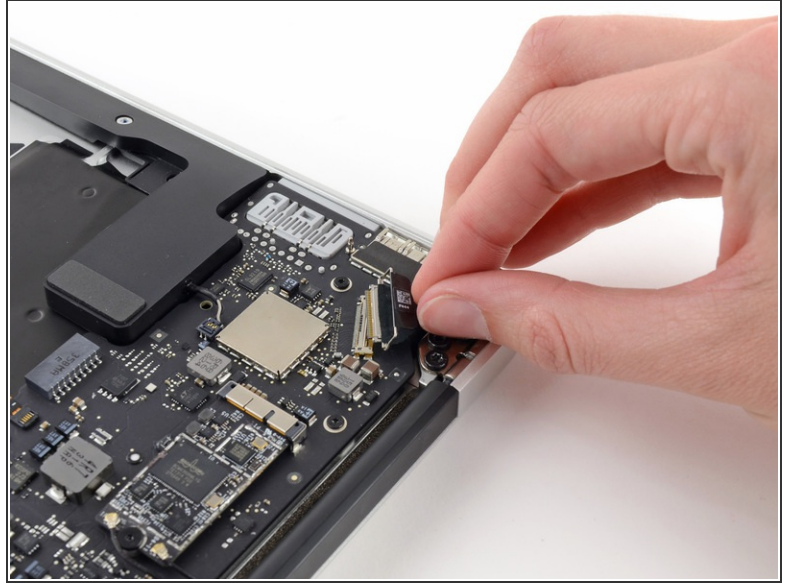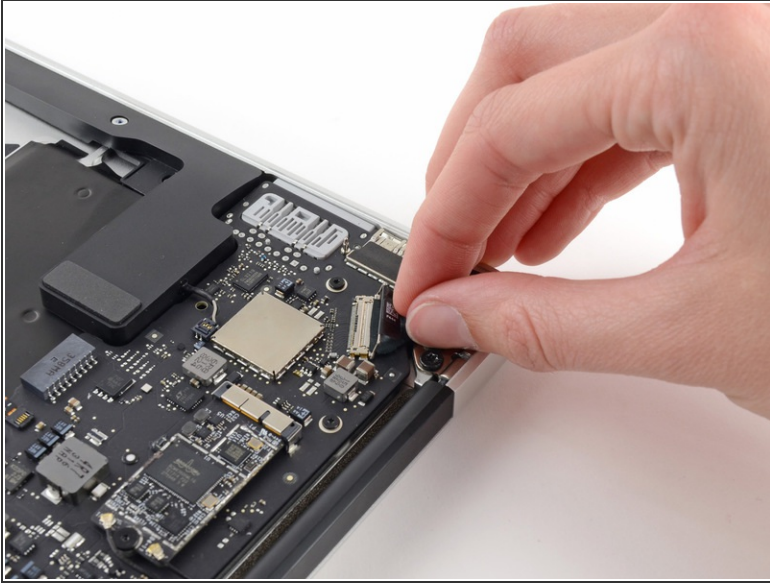

- Pull the display data cable connector straight away from its socket.



⚠ Make sure to pull the connector parallel to the logic board, do **not** lift straight up from its socket.

Step 22

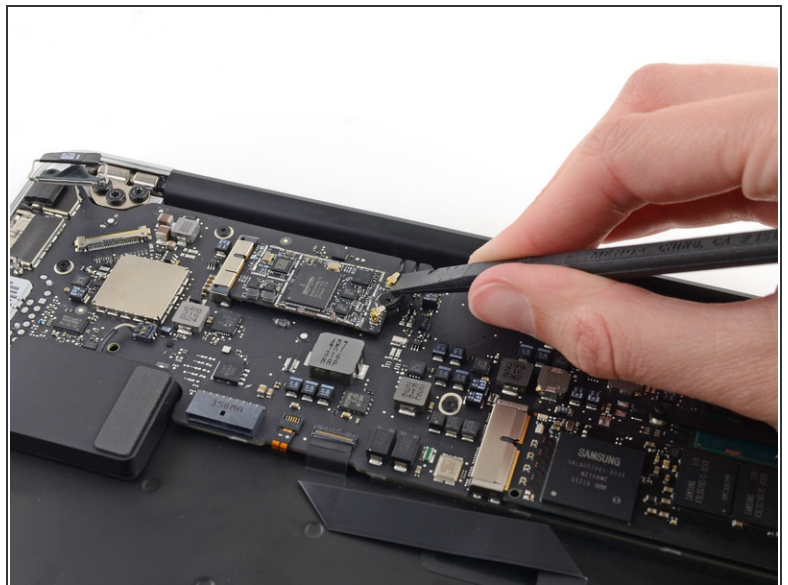



- Use the flat end of a spudger to pry both antenna cable connectors up and off their sockets on the AirPort/Bluetooth card.

Step 23

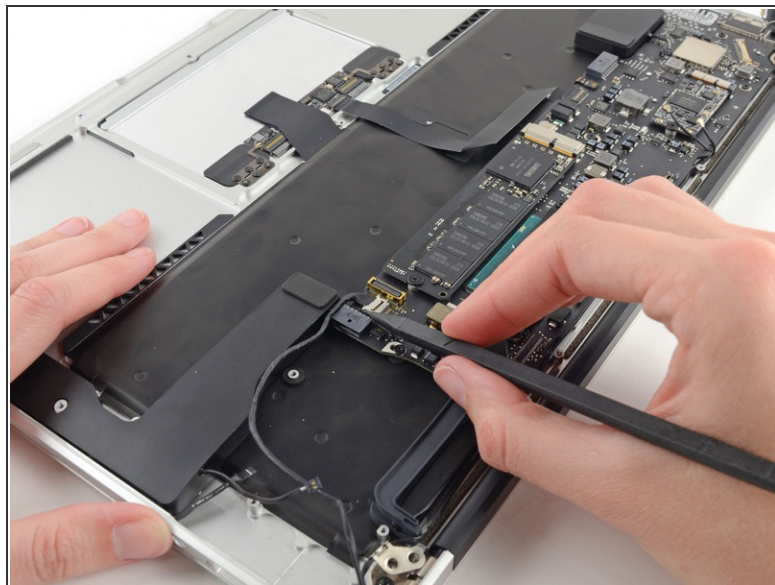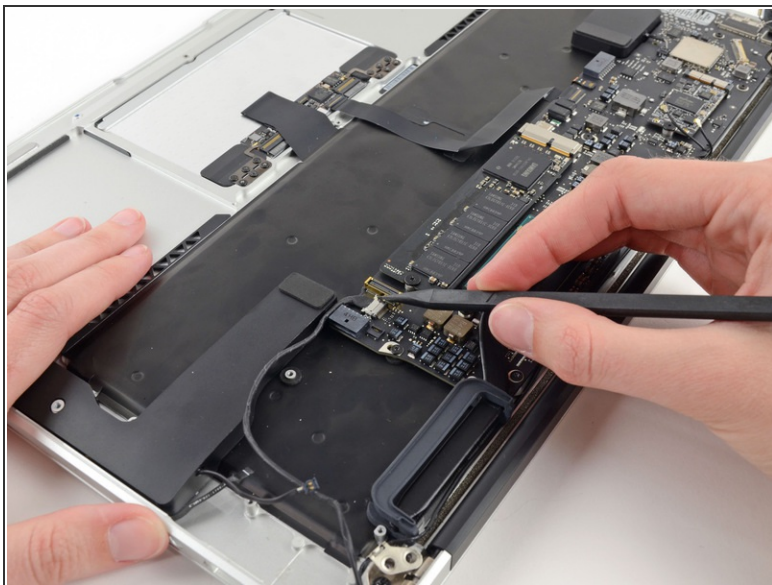

- Disconnect the camera cable connector with the tip of a spudger.
- ⓘ Push first on one side of the connector, then on the other side to carefully "walk" it out of its socket.
- Pull the camera cable parallel to the face of the I/O board toward the front edge of the Air to disconnect it from its socket.
- ⚠ Do not lift upward on this cable as you disconnect it, as its socket may break off the logic board.

Step 24


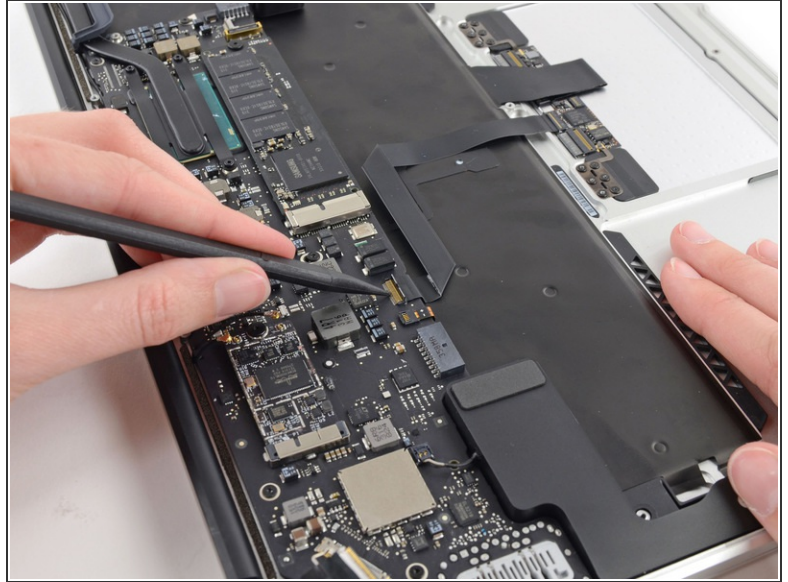
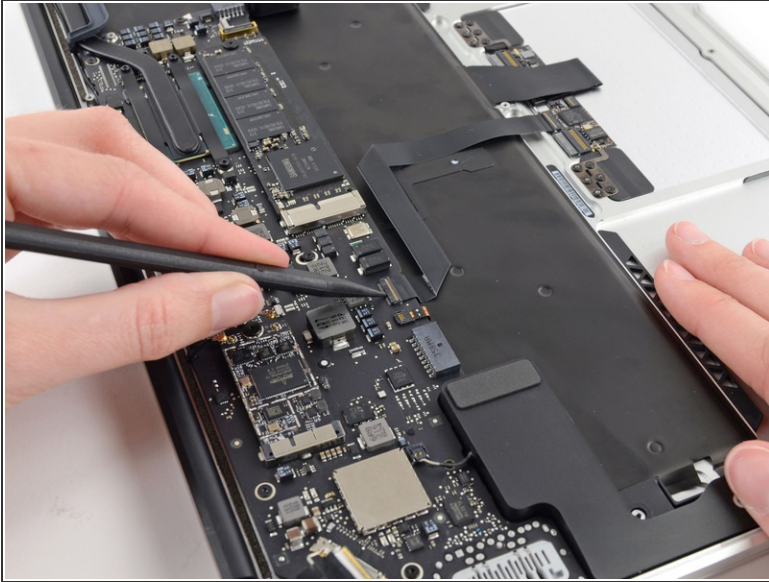


- Use the tip of a spudger or your fingernail to flip up the retaining flap on the trackpad ribbon cable ZIF socket.

⚠ Be sure you are prying up on the hinged retaining flap, **not** the socket itself.

- Pull the trackpad ribbon cable straight out of its socket toward the front edge of the Air.

Step 25

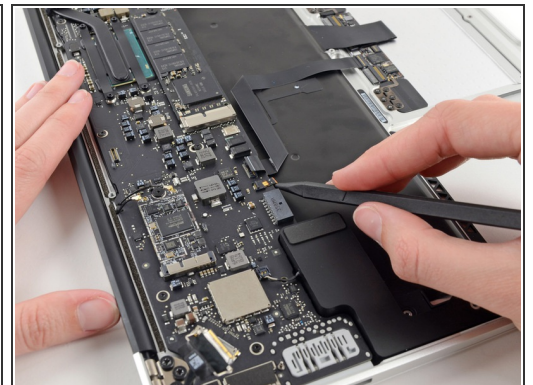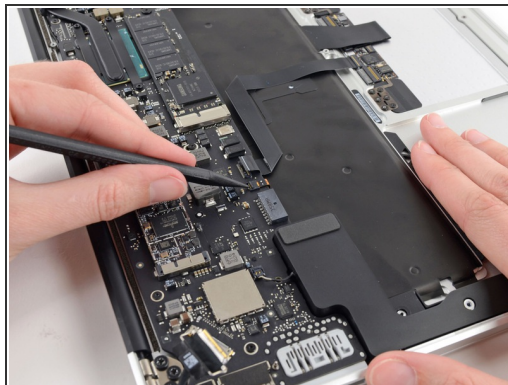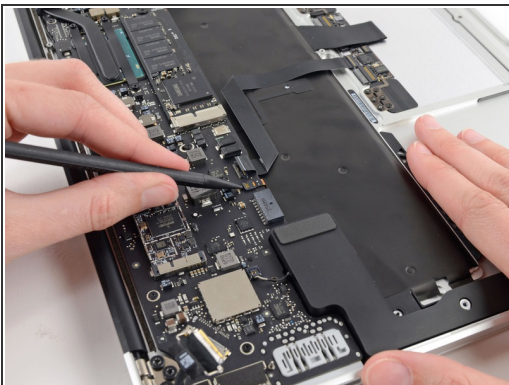


- Use the tip of a spudger to flip up the retaining flap on the keyboard backlight ribbon cable ZIF socket.

⚠ Be sure you are prying up on the hinged retaining flap, **not** the socket itself.

- Use your spudger to gently pull the keyboard backlight ribbon cable out of its socket.


Step 26

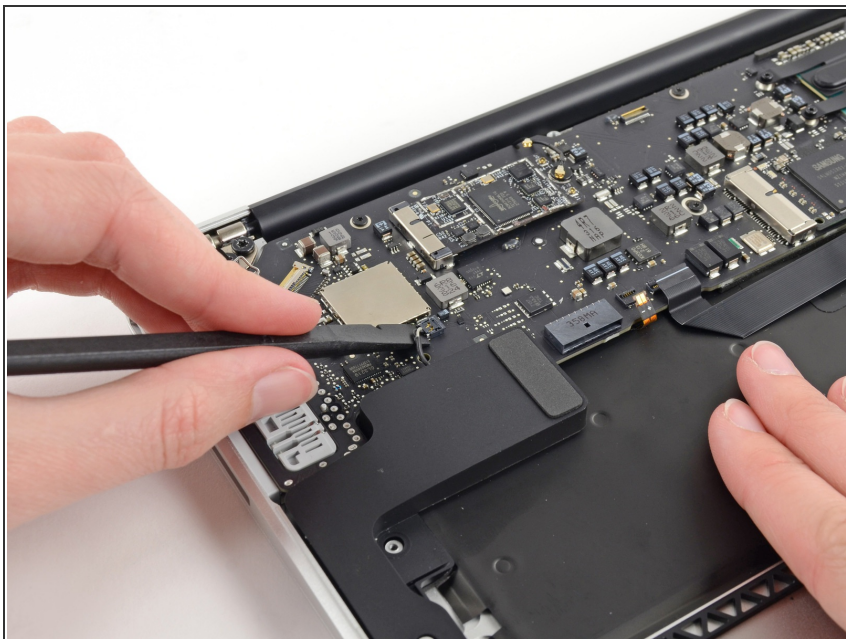

- Use the flat end of a spudger to pry the right speaker cable connector up and out of its socket on the logic board.

i It is recommended to pry up from beneath the cables.

Step 27

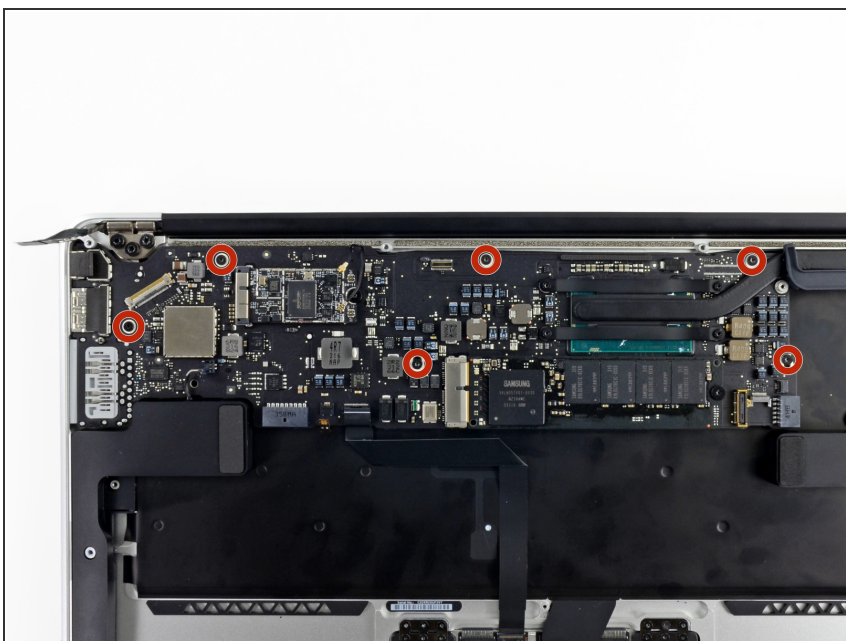

- Remove the six 6.3 mm T5 Torx screws securing the logic board to the upper case.

i On some models these may be 4.1 mm T5 Torx screws.

Step 28



- Remove the inner two 4.9 mm T8 Torx screws securing the antenna cable retainer and left clutch hinge to the upper case.

Step 29




- Push the antenna cable retainer away slightly and remove the 3 mm T5 Torx screw securing the end of the heat sink to the upper case.

Step 30




- Slide the flat end of a spudger under the right speaker from the end nearest the hinge to the front edge of the Air to loosen the adhesive.
- Remove the right speaker from the upper case.

Step 31

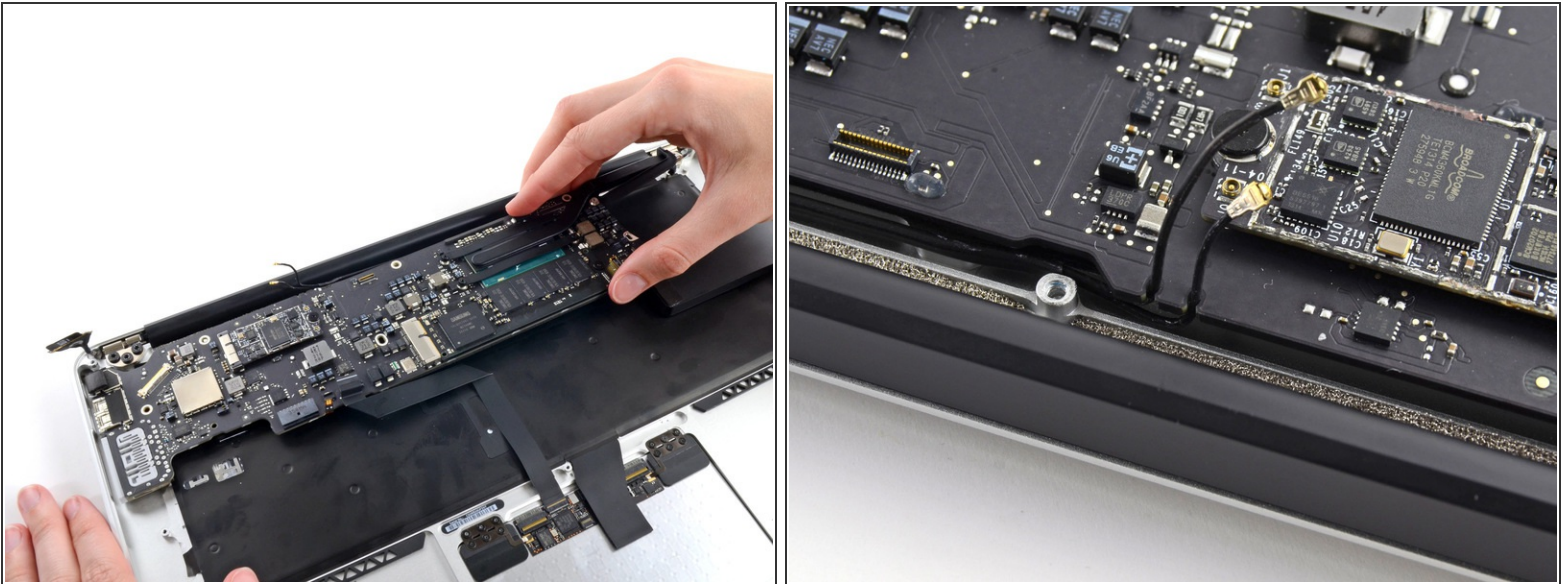



- Carefully remove the logic board assembly from the upper case, minding any cables that may get caught.
- ☒ During reassembly, make sure the antenna cables are inserted into their respective notches on the logic board, as highlighted in the second picture.

Step 32 — Logic Board

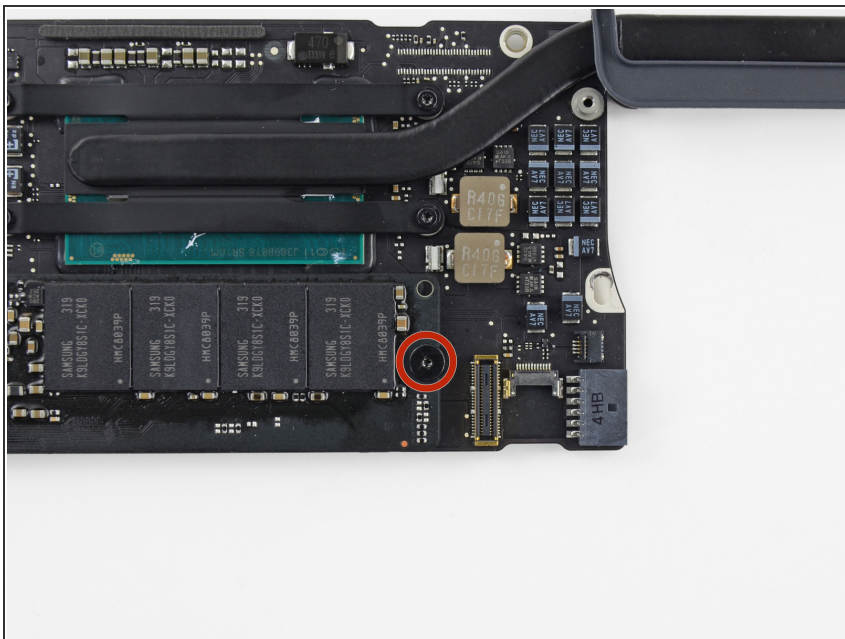

- Remove the single 2.85 mm T5 Torx screw securing the SSD to the logic board.

Step 33

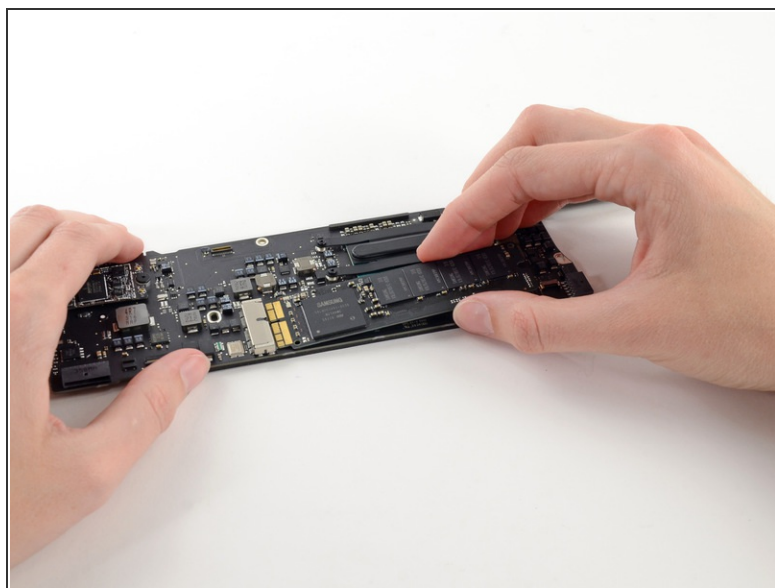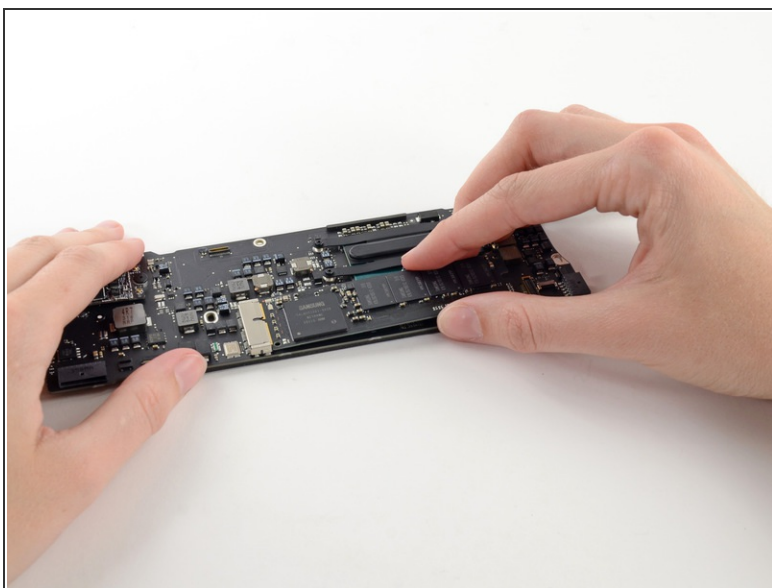


To avoid damaging its socket, do not lift the end of the SSD excessively.

- Pull the drive straight out of its socket and remove it from the logic board.





When reinstalling the SSD, be sure it is properly seated before reinstalling its retaining screw.

Step 34

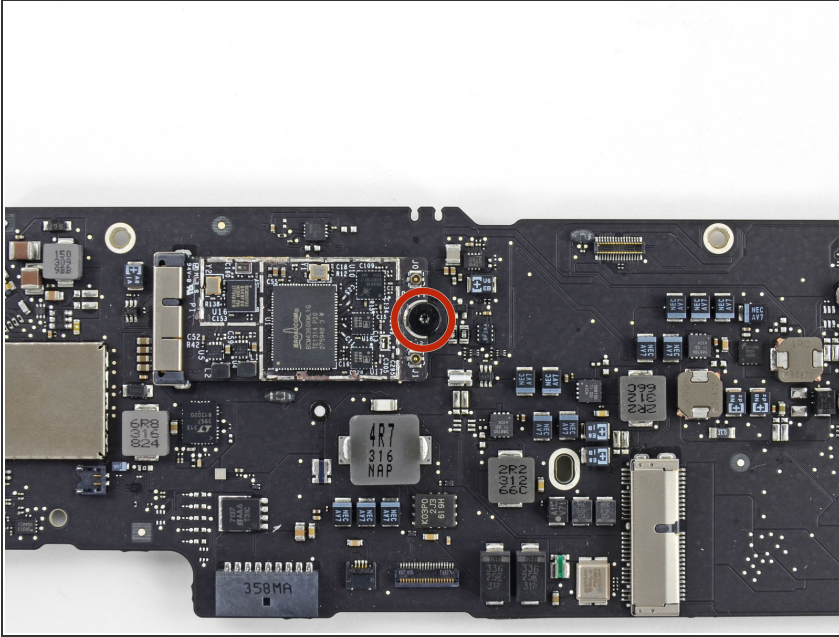

- Remove the single 2.9 mm T5 Torx screw securing the AirPort/Bluetooth board to the logic board.


Step 35

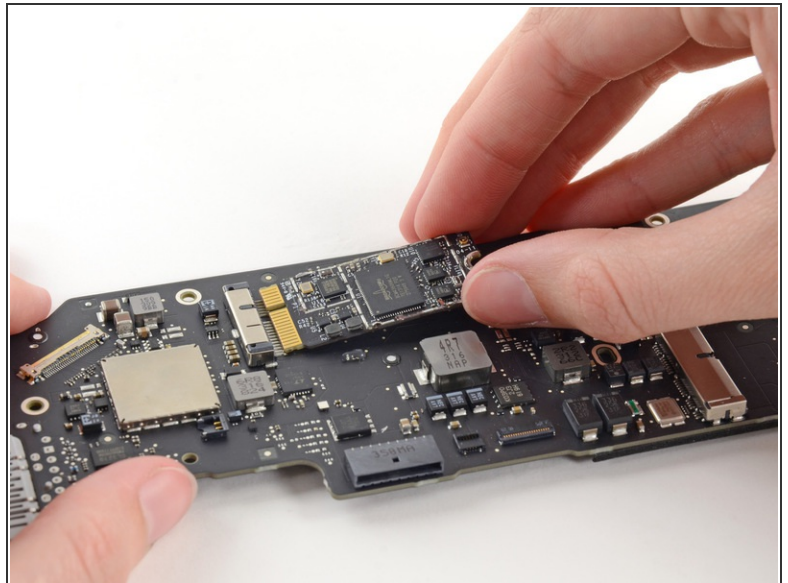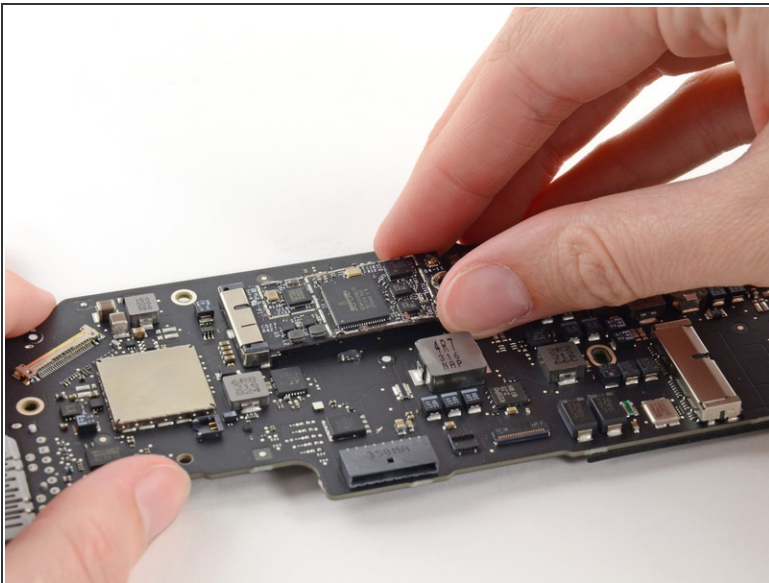

⚠ To avoid damaging its socket, do not lift the end of the AirPort/Bluetooth board excessively.



- Slightly lift the free end of the AirPort/Bluetooth board and pull it out of its socket on the logic board.
- Remove the AirPort/Bluetooth board from the logic board.

Step 36

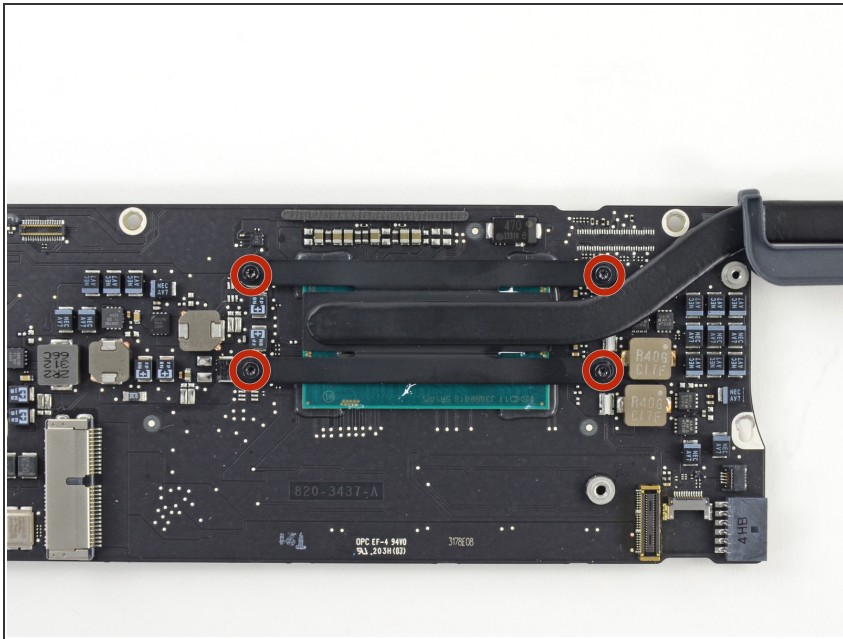

- Remove the four 2.5 mm T5 Torx screws securing the heat sink to the logic board.

Step 37

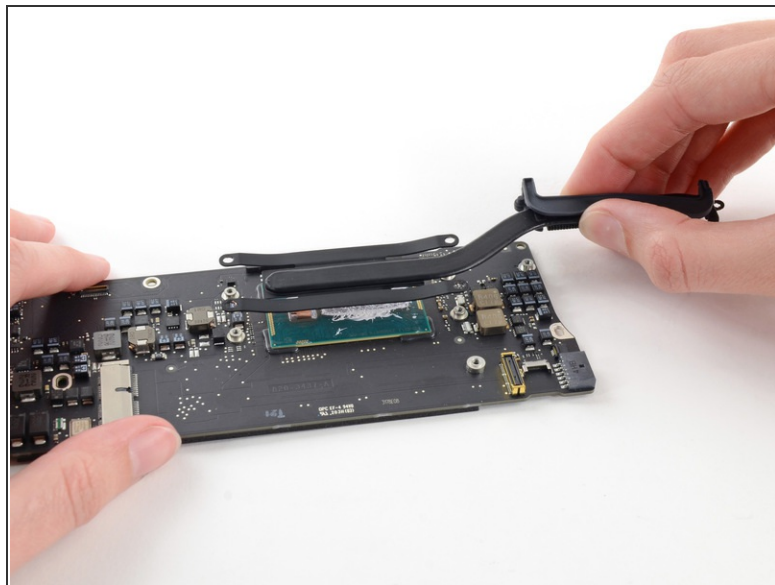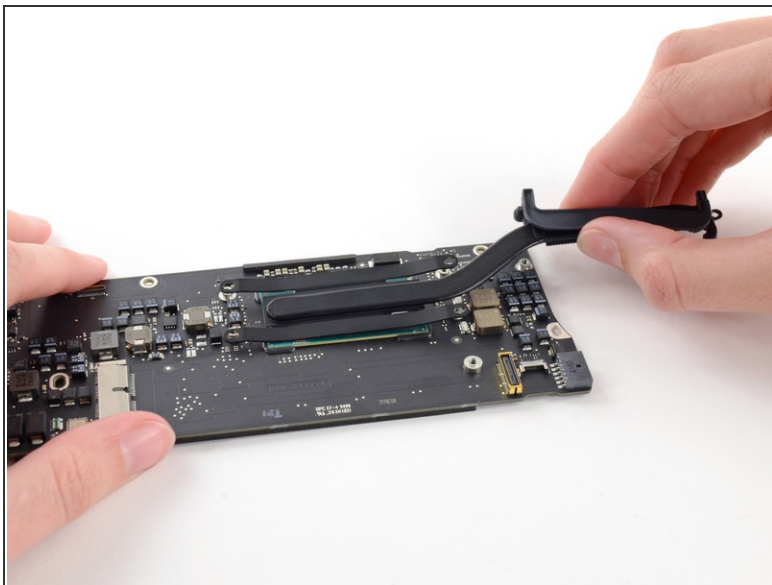

- ❗ If the heat sink seems to be stuck to the logic board after removing all four screws, use a spudger to carefully separate the heat sink from the faces of the CPU and GPU.
- Remove the heat sink from the logic board.
- 🔧 When reinstalling the heat sink, be sure to apply a new layer of [thermal paste](#). If you have never applied thermal paste before, we have a [guide](#) that makes it easy.

Step 38



- ✦ When reassembling your device, be sure the heat sink's rubber gasket is installed correctly. The nub on the gasket should mate with the hole cut into the logic board near the heat sink fins.
- ⓘ The tail of the gasket should fit into the notch in the heat sink, it should not end up underneath the heat sink tab that will rest on the logic board.
- Make sure the antenna cables are inserted into their respective notches on the logic board, as highlighted in the last picture.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-10-25 05:38:38 PM.